


INTERSECTION APPROACH (COMMERICAL DRIVE)

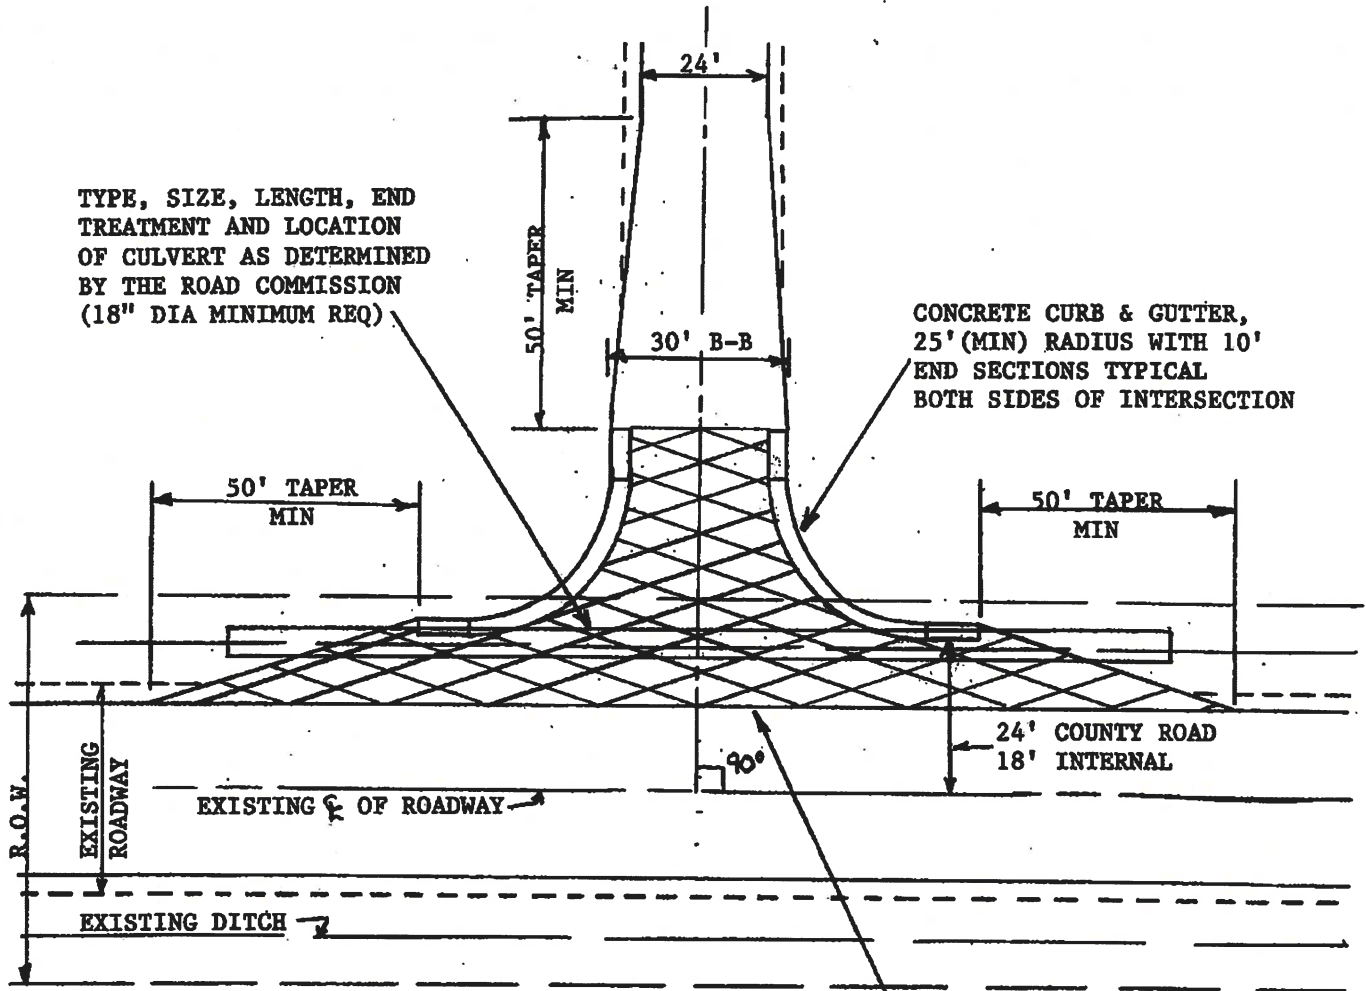

TYPE, SIZE, LENGTH, END TREATMENT AND LOCATION OF CULVERT AS DETERMINED BY THE ROAD COMMISSION (18" DIA MINIMUM REQ)

CONCRETE CURB & GUTTER, 25' (MIN) RADIUS WITH 10' END SECTIONS TYPICAL BOTH SIDES OF INTERSECTION

GENERAL NOTES:



THE PROPOSED INTERSECTION APPROACH SHALL BE CONSTRUCTED OF THE MATERIALS AND THICKNESS SPECIFIED IN THE "TYPICAL PLATTED STREET CROSS-SECTION"

THE CURB AND GUTTER SHALL BE AS SPECIFIED HERE WITHIN.

SAW CUT TO CONSTRUCT BUTT JOINT ALONG WHITE LINE OR AS SPECIFIED BY ENGINEER

FIGURE 7